

## ANNEALED ALUMINUM TAPE

<b>Product</b>	Aluminum 1070A
<b>Material</b>	Aluminum 1070 A
<b>Applications</b>	High/Medium Voltage cable screening

Reference	Aluminum Thickness +/- tolerance
AL200 (1070A)	200 +/- 12
AL300 (1070A)	300 +/- 18
AL400 (1070 A)	400 +/- 24
AL500 (1070 A)	500 +/- 25

### Technical Characteristics

Aluminium Properties	Metric		Test Method
	Value	Units	
Tensile Strength	≥ 60	Mpa	ASTM D882 /EN13999
Elongation to Break	≥ 15	%	ASTM D882 /EN13999
Electrical Resistivity	0,0281	μΩ/mm	Internal

## Conditioning

<b>Slitting width</b>	From 26mm to 500 mm $\pm$ 0,50 mm
<b>Standard coils widths</b>	500 mm
<b>Maximum Outer Diameter OD</b>	1300 mm
<b>Available Core ID</b>	100, 152, 400 for Thickness $\geq$ 300 $\mu$ m 76, 100, 120, 152, 400 for $\leq$ 200 $\mu$ m


Core in Plastic or Carton

## Packaging:

In wooden pallets Eye to sky or Flat Eye



*Eye to sky*

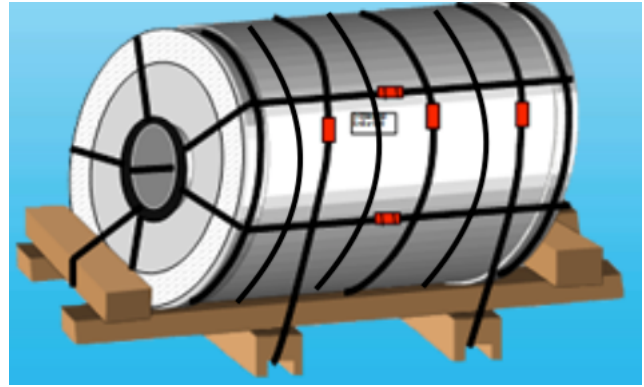

*Flat Eye*