

FLAME RETARDANT NON-WOVEN TAPES

CONSTRUCTION

POLYESTER NON-WOVEN FABRICS
 HALOGEN FREE FLAME RETARDANT COMPOUND

DESCRIPTION


Separating films used for binding and as a solution for peeling cables between cable components with enhanced fire barrier for cable

Properties	Unit	NWPT-15	Test method
Thickness	mm	0.15±0.03	ISO 9073-2
Mass per unit area	g/m ²	120±30	ISO 9073-1
Tensile strength	N/15mm	≥6 0	ISO 9073-3
Elongation	%	≥8	ISO 9073-3
Oxygen Index	%	26	ASTM D2863
Short term stability	°C	230	Q/TR.J02.031-2000
Long term stability	°C	90	IEC 216
Moisture content	%	≤8	ISO 287

PACKAGING

Pad ID: 76 mm /152 mm OD: Max. 500 mm Foil Width: 10 mm up to Jumbo Width Core: Plastic/Carbon


PAD DIMENSIONS (STANDARD)

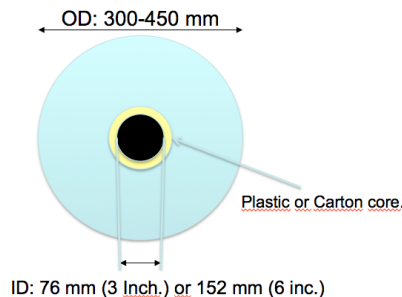

Spool ID:76 mm A:260-480 mm/B: 280-500/C:250-530 Foil Width: 10 to 40 mm Core: Carton

A:300-590mm/ B:320-610mm/C:350-530 mm Foil Width: 25 to 40 mm Core: Carton

SPOOL DIMENSION (STANDARD)

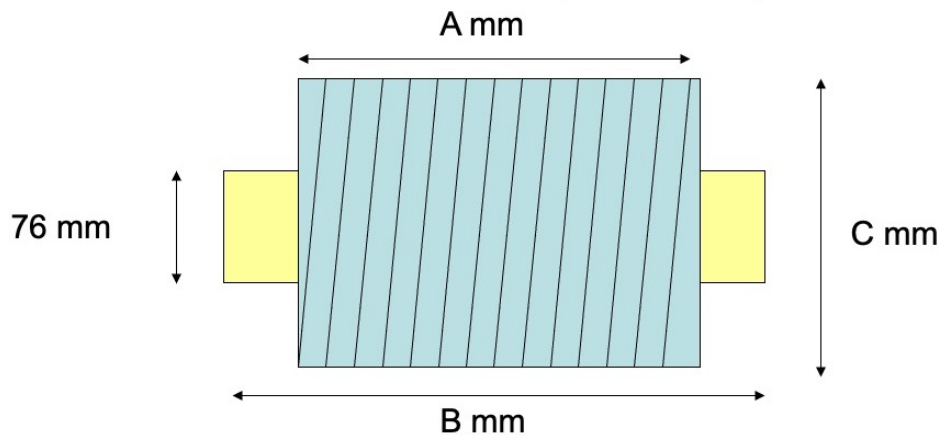

- Spool Handling requires special attention to avoid side damage to product.
- For other Pet thicknesses or packaging dimensions please contact us.